

5"

5SP10 - SUBMERSIBLE PUMP


▶ STAINLESS STEEL SUBMERSIBLE PUMPS ◀

▶ Typical applications:

- Water supply system
- Booster
- Garden and farm irrigation
- Lowering underground water level
- Various industrial applications

▶ Pump / Motor

- Adopted the NEMA standard
- Insulation class: F
- Protection grade: IP68
- Maximum diameter ϕ 125mm
- Highest temperature of liquid: 35°C

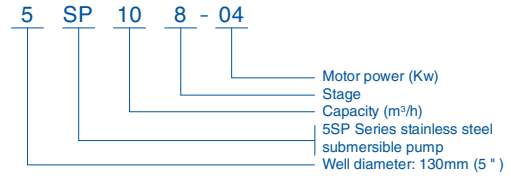

Diffuser height: 48mm


▶ PERFORMANCE TABLE

rpm: 2850 Outlet: G2 1/2" ~ G3"

TYPE	Motor power		Capacity and head								
	KW	Hp	I/min	0	83	133	167	200	250	333	Length
			m ³ /h	0	5	8	10	12	15	20	mm
5SP10-03	1.5	2	Head (m)	33	31	29	27	25	21	12	362
5SP10-04	2.2	3		44	41	38	36	33	28	16	410
5SP10-06	3	4		66	62	58	55	49	42	24	506
5SP10-18	4	5.5		88	82	77	73	66	56	32	602
5SP10-11	5.5	7.5		121	113	106	100	90	77	44	746
5SP10-15	7.5	10		165	155	144	137	123	105	60	938
5SP10-18	9.2	12.5		198	185	173	164	148	126	72	1082
5SP10-22	11	15		242	227	211	200	180	154	88	1274
5SP10-26	13	17.5		286	268	250	237	213	182	104	1466
5SP10-30	15	20		330	309	288	273	246	210	120	1658



5SP10 SUBMERSIBLE PUMPS

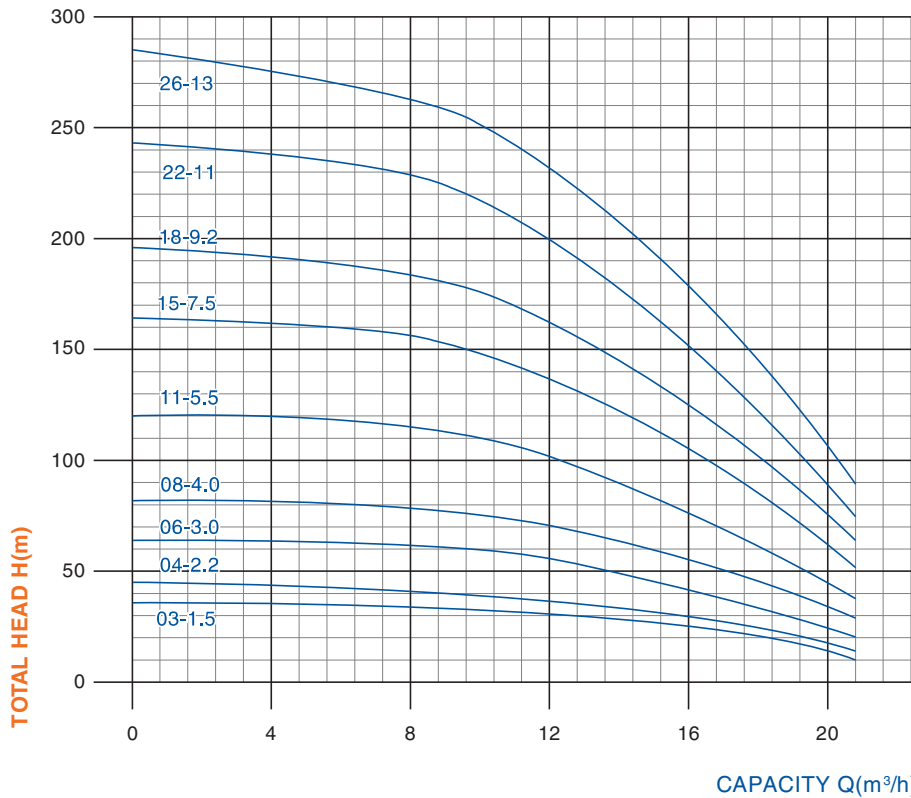

5"

5SP15 - SUBMERSIBLE PUMP


▶ STAINLESS STEEL SUBMERSIBLE PUMPS ◀

▶ Typical applications:

- Water supply system
- Booster
- Garden and farm irrigation
- Lowering underground water level
- Various industrial applications

▶ Pump / Motor

- Adopted the NEMA standard
- Insulation class: F
- Protection grade: IP68
- Maximum diameter ϕ 125mm
- Highest temperature of liquid: 35°C

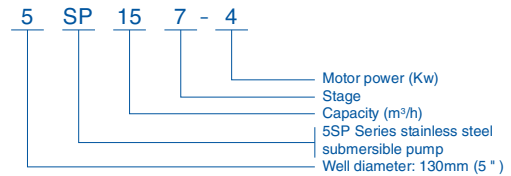

Diffuser height: 48mm


▶ PERFORMANCE TABLE

rpm: 2850 Outlet: G2 1/2" ~G3"

TYPE	Motor power		Capacity and head								Length mm
			l/min	0	167	200	250	283	333	416	
	KW	Hp	m³/h	0	10	12	15	17	20	25	
5SP15-03	2.2	3	Head (m)	33	30	28	26	23	18	8	362
5SP15-05	3	4		55	50	46	43	38	30	13	458
5SP15-07	4	5.5		77	70	64	60	53	42	18	554
5SP15-09	5.5	7.5		99	90	83	77	68	54	23	650
5SP15-13	7.5	10		143	130	120	111	99	78	33	842
5SP15-16	9.2	12.5		176	160	147	136	122	96	40	986
5SP15-19	11	15		209	190	175	162	144	114	48	1130
5SP15-22	13	17.5		242	220	202	187	147	132	55	1274
5SP15-25	15	20		275	250	230	213	190	150	63	1418



5SP15 SUBMERSIBLE PUMPS

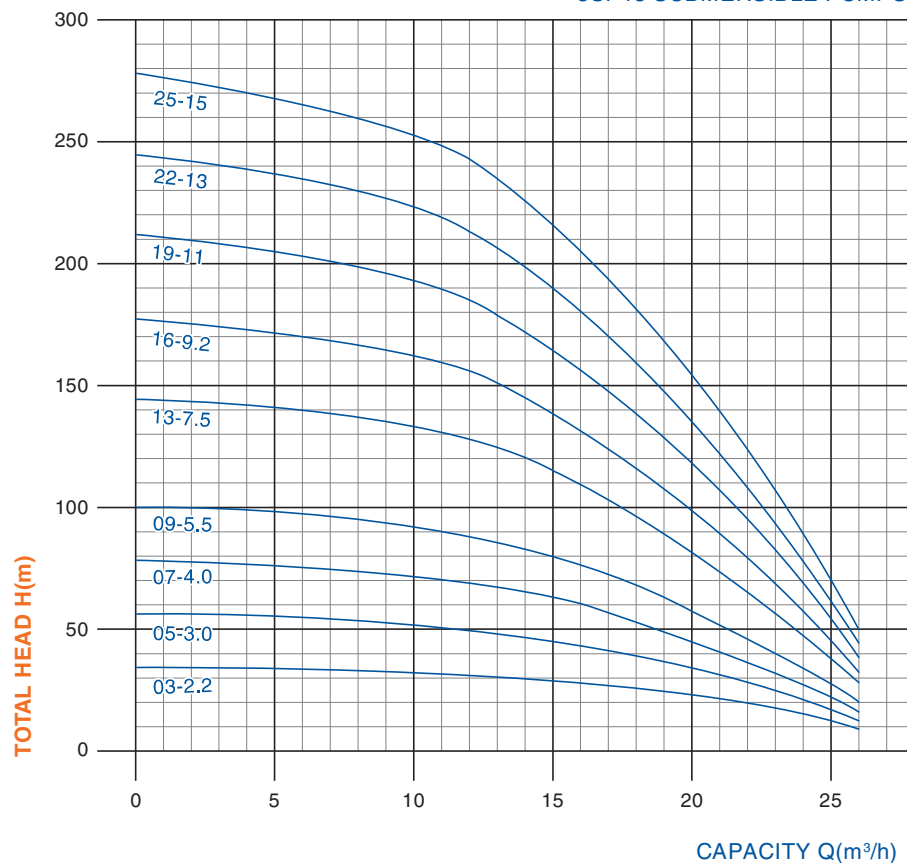

5"

5SP20 - SUBMERSIBLE PUMP


▶ STAINLESS STEEL SUBMERSIBLE PUMPS ◀

▶ Typical applications:

- Water supply system
- Booster
- Garden and farm irrigation
- Lowering underground water level
- Various industrial applications

▶ Pump / Motor

- Adopted the NEMA standard
- Insulation class: F
- Protection grade: IP68
- Maximum diameter ϕ 125mm
- Highest temperature of liquid: 35°C

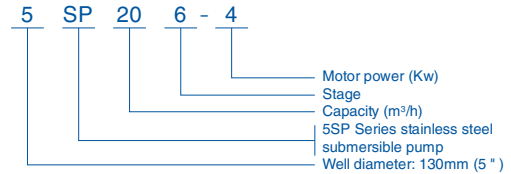


Diffuser height: 56mm

▶ PERFORMANCE TABLE

rpm: 2850 Outlet: G2 1/2" ~G3"

TYPE	Motor power		Capacity and head							
	KW	Hp	l/min	0	167	250	333	416	500	Length
			m ³ /h	0	10	15	20	25	30	mm
5SP20-3	2.2	3	Head (m)	32	28	26	23	17	11	396
5SP20-4	3	4		42	37	34	30	23	14	452
5SP20-6	4	5.5		63	55	52	45	35	22	564
5SP20-8	5.5	7.5		84	74	69	60	46	29	676
5SP20-11	7.5	10		116	101	95	83	64	40	844
5SP20-13	9.2	12.5		137	120	112	98	75	47	956
5SP20-16	11	15		168	147	138	120	93	58	1124
5SP20-19	13	17.5		200	175	163	143	110	68	1292
5SP20-22	15	20		231	202	189	165	128	79	1460

5SP20 SUBMERSIBLE PUMPS

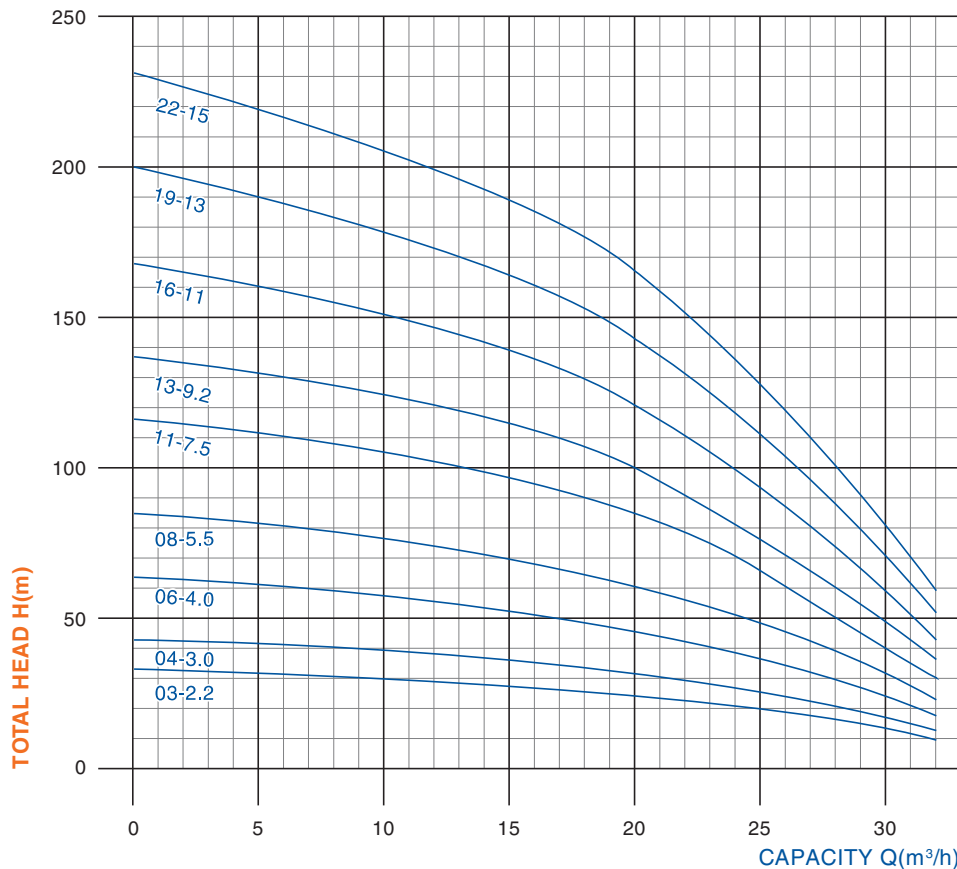

5"

5SP25 - SUBMERSIBLE PUMP


▶ STAINLESS STEEL SUBMERSIBLE PUMPS ◀

▶ Typical applications:

- Water supply system
- Booster
- Garden and farm irrigation
- Lowering underground water level
- Various industrial applications

▶ Pump / Motor

- Adopted the NEMA standard
- Insulation class: F
- Protection grade: IP68
- Maximum diameter ϕ 125mm
- Highest temperature of liquid: 35°C

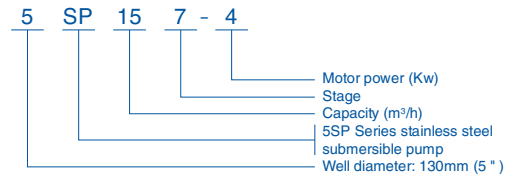

Diffuser height: 56mm


▶ PERFORMANCE TABLE

rpm: 2850 Outlet: G2½" ~G3"

TYPE	Motor power		Capacity and head							Length mm
			l/min	0	250	333	416	500	583	
	KW	Hp	m³/h	0	15	20	25	30	35	
5SP25-2	1.5	2	Head (m)	22	19	18	15	11	7	340
5SP25-3	2.2	3		33	28	26	22	16	11	396
5SP25-4	3	4		44	37	35	30	22	14	452
5SP25-5	4	5.5		55	47	44	37	27	18	508
5SP25-7	5.5	7.5		77	65	62	52	38	25	620
5SP25-10	7.5	10		110	93	88	75	54	36	788
5SP25-12	9.2	12.5		132	112	106	90	65	43	906
5SP25-14	11	15		154	130	123	105	76	50	1012
5SP25-17	13	17.5		187	158	150	127	92	61	1180
5SP25-20	15	20		220	186	176	150	108	72	1348



5SP25 SUBMERSIBLE PUMPS

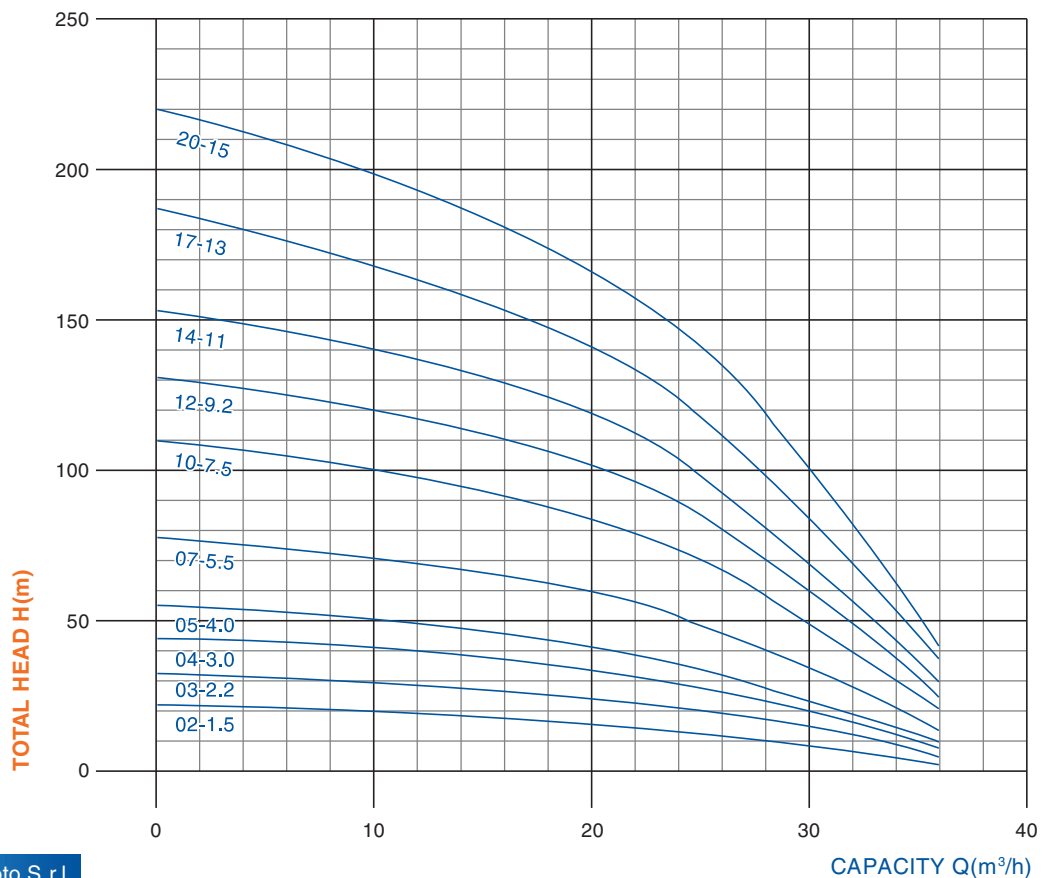

5"

5SP30 - SUBMERSIBLE PUMP


▶ STAINLESS STEEL SUBMERSIBLE PUMPS ◀

▶ Typical applications:

- Water supply system
- Booster
- Garden and farm irrigation
- Lowering underground water level
- Various industrial applications

▶ Pump / Motor

- Adopted the NEMA standard
- Insulation class: F
- Protection grade: IP68
- Maximum diameter ϕ 125mm
- Highest temperature of liquid: 35°C

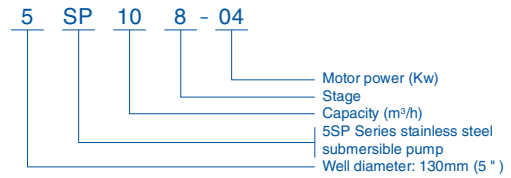

Diffuser height: 56mm

▶ PERFORMANCE TABLE

rpm: 2850 Outlet: G2 1/2" ~ G3"

TYPE	Motor power		Capacity and head								
	KW	Hp	I/min	0	250	333	416	500	583	666	Length
			m³/h	0	15	20	25	30	35	40	mm
5SP30-3	3	4	Head (m)	33	30	28	24	21	15	9	396
5SP30-4	4	5.5		44	40	37	32	28	20	12	452
5SP30-6	5.5	7.5		66	60	55	49	42	30	18	564
5SP30-8	7.5	10		88	80	74	65	56	40	24	676
5SP30-10	9.2	12.5		110	100	93	82	70	50	30	788
5SP30-12	11	15		132	120	111	98	84	60	36	900
5SP30-14	13	17.5		154	140	130	114	98	70	42	1012
5SP30-16	15	20		176	160	148	131	112	80	48	1124



5SP30 SUBMERSIBLE PUMPS

